

## Web Setup manual

<b>Get start with Web Setup</b>	<b>2</b>
<b>Features</b>	<b>2</b>
Setup/Quick Setup/Tuner Preset	2
Store/Recall	2
Backup and upload configurations	2
Factory Reset	2
Status information + Control	2
Print Current Configuration	2
Change login password	2
<b>Screen</b>	<b>3</b>
Navigation bar	3
Setup contents	3
radio button	3
button	4
select box	4
textbox	4
slider	5
tab	5
status dialog	6
additional menu sidebar	6
<b>Others</b>	<b>7</b>
Loading screen	7
Alert	7
Lock screen	7
<b>Error screens</b>	<b>8</b>
Networking error	8
About keyboard operation	8
<b>Limitation</b>	<b>8</b>
Supported browsers	8
Language	8
browser's plugins	8
browser zoom feature	8

## Get start with Web Setup

Web Setup is single page web application.  
To start Web Setup, please follow the steps below.

1. Connect your PC or smart device terminal (hereinafter this is called "terminal") to the LAN (no internet required)
2. Connect your device to your LAN (no internet required)
3. Check the IP address of the device (\* 1)
4. Open a browser on your terminal and enter the URL [http://\(IP Address of device\)](http://(IP Address of device))
5. When the authentication screen for login appears ciuser, enter the user name = ciuser and password = ciuser . (\* 2)

### Hint

(\* 1)

You can confirm it by following ways,

- Press INFO key(only Integra model)
  - Open Setup and confirm Network > IP Address
- See [here](#) for supported browsers.

(\* 2)

You can change the password. See [here](#).

## Features

### Setup/Quick Setup/Tuner Preset

Setup/Quick Setup are same features as the on-screen display (OSD) one. Tuner Preset is same feature as remote-control or panel key operation.

### Store/Recall

These are same features as Store/Recall of the device.

### Backup and upload configurations

Backup Configuration to File downloads the device configurations to the terminal. Upload Configuration from File is the reverse operation of Backup ... and uploads configurations file from the terminal to the device.

### Factory Reset

This is same feature as Factory Reset of the device.

## Status information + Control

Web Setup can display current status of following information's,

### Zone

- Power
- Volume
- Selector
- Mute

### 12V Trigger

### Amp information's

- Protect
- Temperature
- FAN Speed

**Audio information**(except Output Sampling Freq.)

### Video information

Only power is controllable.

GUI is [here](#).

## Print Current Configuration

Web Setup can display data optimized for printing layout.

### DRX-8.4

Firmware Version:R118-0506-1131-0133

### Input / Output Assign

TV Out / OSD		HDMI 4K / 8K Signal Format	
HDMI Out	MAIN	BD/DVD	4K Enhanced
Dolby Vision	---	GAME	8K Enhanced
Upscaling	Off	CBL/SAT	4K Enhanced
Super Resolution	---	STRM BOX	4K Enhanced
Zone2 HDMI	Not Use	PC	4K Enhanced
OSD Language	English	CD	---
Impose OSD	On	TV	---
Mini Player OSD	Always On	PHONO	---
Screen Saver	3 minutes	EXTRA 1	---
		EXTRA 2	---
		EXTRA 3	---

HDMI Input		Video Input	
BD/DVD	HDMI 1 (HDCP 2.3)	BD/DVD	COMPONENT
		GAME	---
GAME	HDMI 2 (HDCP 2.3)	CBL/SAT	VIDEO 2
		STRM BOX	VIDEO 1

## Change login password

You can change your password from the additional menu > Change Password The following characters cannot be used.



- space
- Non-ASCII characters

After changing the password, you will need to reload Web Setup.

# Screen

The screen consists of the following drawing areas.


- header
- Navigation bar
- Setup contents
- Additional menu side bar

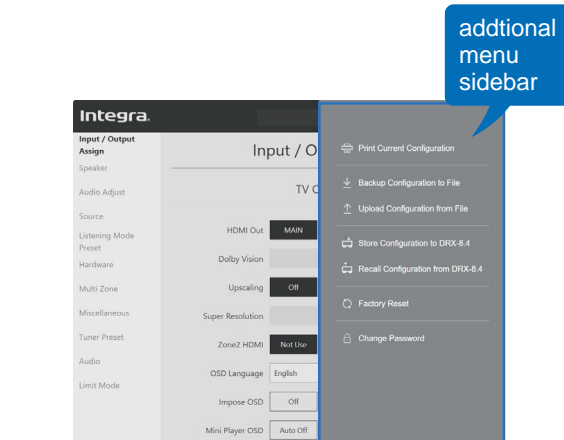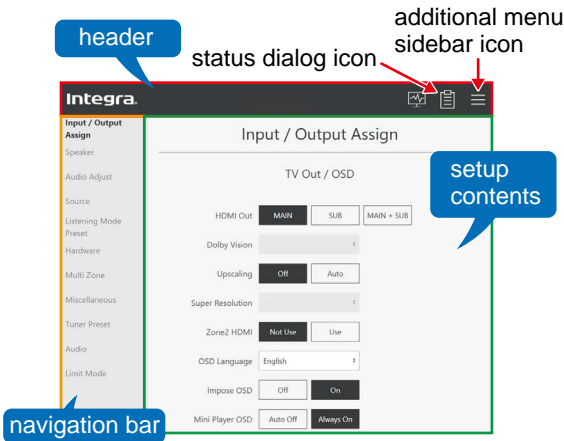

# Navigation bar

This is navigation menu for setup contents.

Sub menu is shown when hover mouse cursor on Main menu. Click an menu to jump to that item.

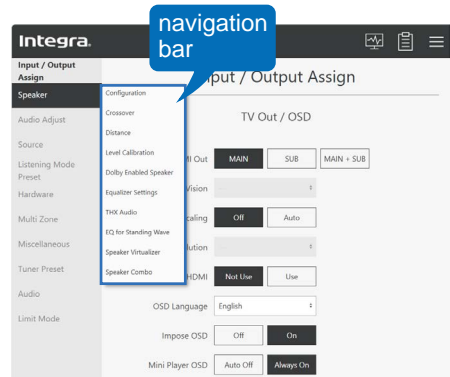


# Setup contents

You can change the setup contents from the GUI control.

- radio button
- button
- select box
- textbox
- slider
- tab

# radio button


This is a screenshot of a radio button.

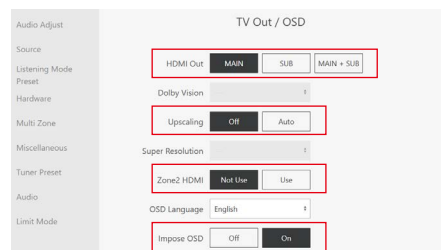

This is similar to a standard HTML radio button. Web Setup will the current settings grayed out if the item cannot be changed.

## button


This is a screenshot of the button.

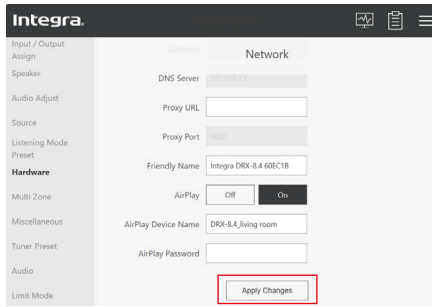

This is similar to a standard HTML button.

## select box

This is a screenshot of the select box.

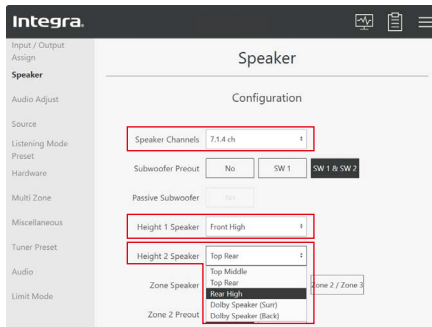


This is similar to a standard HTML select box.

## Tips


When type a character on focused select box, you can select items that start with the character. Please use it when there are many selection items.

## textbox

This is a screenshot of the textbox.

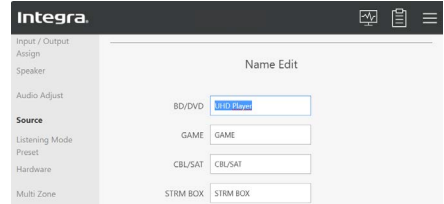

This is similar to a standard HTML select box. Web Setup display error dialog when inputting text of non-ASCII characters.

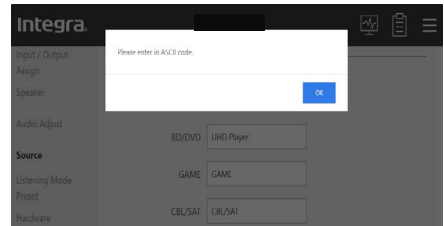

## slider


Slider is made of following components,

- bar
- knob
- label
- value display area
- Non-numeric checkbox(ex. Last, Off)

Slider has following designs,

**design:** normal

**example:**



**design:** zero centered, signed value


**example:**



**note:** The bar is drawn side to side around zero.

**design:** including additional values

**example:**

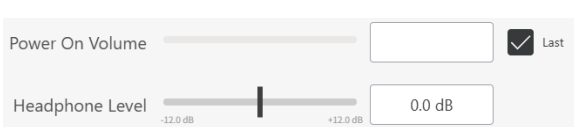

**note:** The bar is not available when the box checked

Here are operations of the slider.

operation	result
drag and drop the knob	set the value of knob's position
click on bar area to the right or left of the knob(*1)	left -> -1 step, right -> +1 step
press left/right cursor key when slider in focus(*1,*2)	left -> -1 step, right -> +1 step

(\*1) Press and hold the key to repeat.

(\*2) Press TAB key or click the bar to focus.

The amount of steps is depended on setup menu. This may be dependent on other settings(ex. Tuner Frequency Step)

--- is displayed on value area when slider is not available.

Tap operation of smart devices is same as click operation.

## Tips


You may feel difficult for setting the value near the Max or Min value.

Please try following operations.

1. Set Max or Min value.
2. Click the bar area to the left or right of the knob to adjust.

## tab

This is a screenshot of the tab.

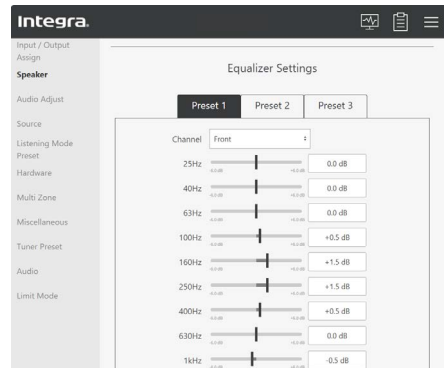


This is similar to the tab control on Windows GUI.

## Note


Unlike PC-Setup, changing to each settings are applied immediately without moving tabs.

## status dialog

This is a screenshot of the status dialog.

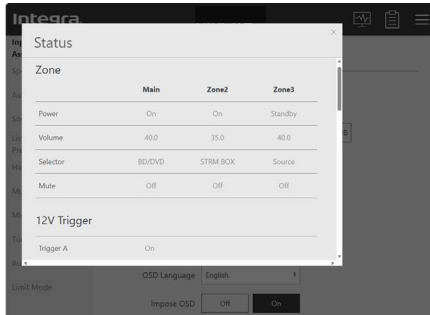


Only power can be controlled.  
Power status is toggled when mouse hover and click.

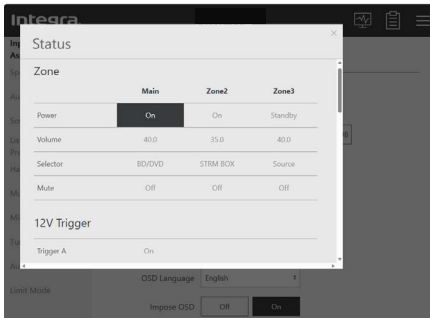

## additional menu sidebar

This is a screenshot of the additional menu sidebar.

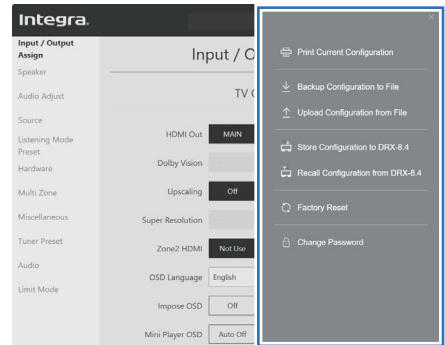

menu	feature
Print Current Configuration	<a href="#">Print Current Configuration</a>
Backup Configuration to File	<a href="#">Backup configurations</a>
Upload Confituration from File	<a href="#">Upload configurations</a>
Store Configuration to (Device)	Same feature as <a href="#">Store</a> of the device.
Recall Configuration from (Device)	Same feature as <a href="#">Recall</a> of the device.
Factory Reset	Same feature as <a href="#">Factory Reset</a> of the device.
Change Password(*2)	<a href="#">Change login password</a>

(\*2)AV Receiver model only.

## Others

### Loading screen

Web Setup needs to load the device settings when the page loads.


This is screenshot of loading screen.



### Alert

Alert dialog is displayed for warning of operations.

The following is a warning screen when trying to go to the standby with the network standby = Off setting.

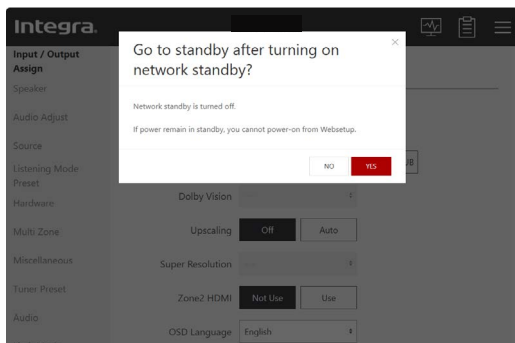

Alert screen has buttons to confirm to continue or cancel the operation.

### Lock screen


The screen of Web Setup is locked in the following situations.

- Main zone is in standby
- Miscellaneous > Lock > Setup = Locked
- After applying network settings
- After running Factory Reset
- After running Recall
- After uploading settings
- Initial Setup/Speaker measurement(e.g. AccuEQ/MCACC)

This is screenshot of the lock screen.


If unlockable, an unlock button will appear.

Web Setup is redrawn and available when screen is unlocked.

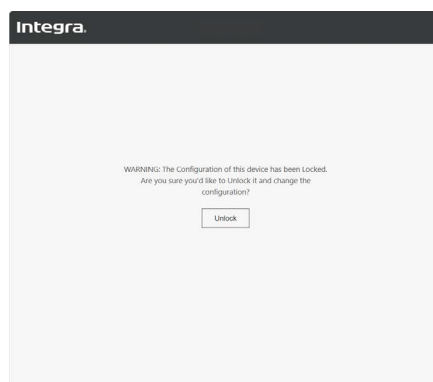

If unlocking is not possible, a screen prompting you to reload manually will be displayed.

If the URL changes, such as when the network is changed, a guide to reload page will be displayed.

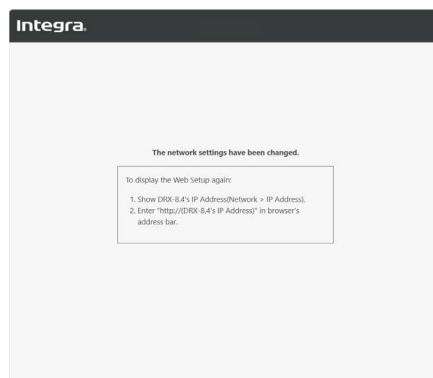


## Error screens

---

### Networking error

This screen is displayed when websetup meet unrecoverable networking errors.  
(ex. LAN cable is unplugged, Network is down, etc...)

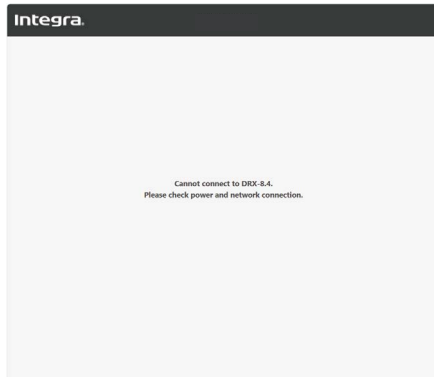

## Limitation

---

### Supported browsers

- Google Chrome
- Safari

### Language

English only

### browser's plugins

Web Setup does not support browser's plugins.

### browser zoom feature

Web Setup supports only 100%.

### About keyboard operation

Web Setup supports basic keyboard operations, but it is browser-dependent and does not fully support it.